



TOP/RECESS FITTING (Inside Window Reveal)

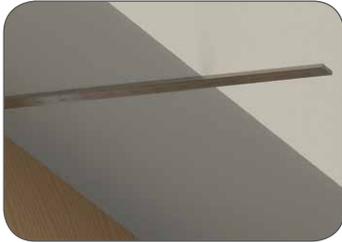


1. When fitting Senses[®] Mirage[®], manually survey the recess using a measuring tape to ensure the recess depth is greater than 80mm.

Note: Check for window furniture to ensure blind will not make any contact during operation.

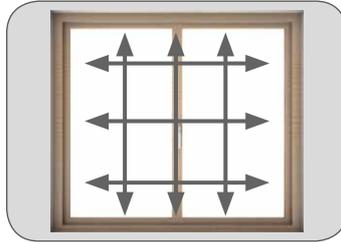

2. Measure the width and drop of the recess at three locations (top/middle/bottom and left/middle/right) and use the smallest sizes.


FACE FITTING (Outside Window Reveal)

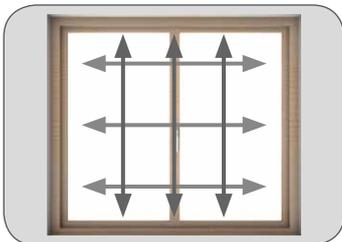

1. Measure the width and drop of the recess at three locations (top/middle/bottom and left/middle/right) and use the smallest sizes.



2. When face fitting, butt the square edges of the tool into the window recess, so that the arrows point horizontally away from the window as above.

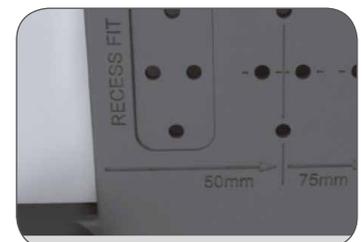

3. Select the required overlap: 22mm (marked 'recess fit'), 50mm, or 75mm and calculate the Blind Width using the recess width recorded in Step 1.


Aluminium Fascia Face Fit (22mm Overhang):Recess +84mm
Aluminium Fascia Face Fit (50mm Overhang):Recess +140mm
Aluminium Fascia Face Fit (75mm Overhang):Recess +190mm

PLEASE NOTE:

Where survey/fitting tool is not used, a measured size will equal the finished blind size (NOT fabric size)

ADDITIONAL INFORMATION:

All deductions for the manufacture of the blind are taken from the Blind Width size attained in this survey.

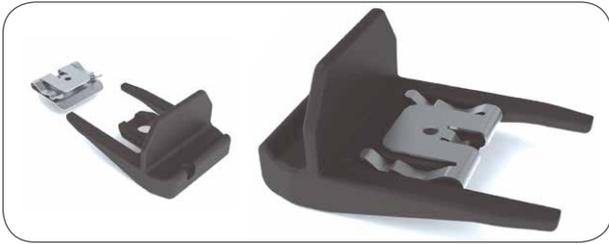

1. Slide a fixing bracket, flat face up, onto the tool. Ensure the bracket is slid all the way on, until the top face hits the ledge on the tool, and the centres of all the holes on the bracket are aligned with the hole on the tool.



2. Take the tool and bracket to the window recess. Butt the flat vertical face of the tool against the outer face, and hold the bracket against the top face of the recess approximately 100mm in from either side of the recess.



3. Keeping the tool in place, either drill a pilot hole through the centre of the holes on the bracket, or - if fitting to a suitable substrate - directly drive a screw up into the recess until tight. Ensure the tool stays flat and square against the recess while doing this. Once the screw is tight, the tool can be pulled out of the bracket.

NOTE: The use of wall plugs is recommended where appropriate.



4. Repeat steps 1 – 3 at the opposite side of the recess. Additional brackets can be evenly spaced and used as centre supports by following these recommendations:
Widths up to 0.8m require 2 brackets.
Widths up to 1.5m require 3 brackets.
Widths up to 2m require 4 brackets.
Widths up to 2.4m require 5 brackets.



5. Enter fascia into top brackets as shown and snap firmly into place (Check fascia is flush with recess edge).



6. The endcaps can move outwards 10mm at each side, which can take up any small gaps between the headrail and the side of the recess that may appear due to mis-measurement.

To Remove Blind



1. To remove blind, fully raise and grip both the fabric roll and the fascia with each hand. Rotate the entire blind downward slightly in the direction shown to open the top fix brackets.
2. While holding the blind in this position, pull it down and away from the brackets.



1. Take the tool to the window and butt the square edges into the window recess, so that the arrows point horizontally away from the window.



2. Pick the required overlap; 22mm (marked 'recess fit'), 50mm or 75mm. Keeping the tool in place, drill into the fitting surface using a 3mm bit through 2 of the 4 holes. *It is recommended to use the top and bottom holes where possible.*





3. Centre supports are recommended on blinds over 600mm in width and should be fitted no more than 500mm apart. If centre supports are required, move the tool along the recess and drill required holes.



4. Remove the tool, revealing the two holes. Take the bracket to the holes and line them up within the slots on the bracket base. Insert screws into the holes and tighten. Using the top and bottom slots allows for sideways adjustment of the bracket before completely tightening. Repeat for additional brackets and centre supports. *(Please note that the use of wall plugs is recommended where appropriate.)*



5. When all brackets have been fitted, insert blind by lining up fascia end caps with slots on fixing brackets. Adjustment of fascia end caps can be used to aid this process. When both sides have been located ensure blind is pushed fully home until locks on both the fixing and centre support have been snapped into place.

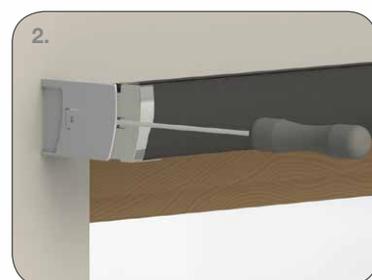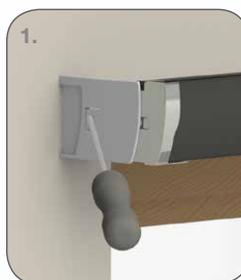

TO REMOVE BLIND

1. Using flat blade screwdriver, release locking clip as shown and pull fascia away from bracket.
2. Using flat blade screwdriver, release locking clip by inserting screwdriver between bracket and end cap.



All our Mirage Roller fabrics can be used in the Senses Mirage system to bring a stylish finish to your blind.

- 6 headrail/bottom rail & endcap colours
- Compatible with existing range of Senses endcaps and fascias
 - Suitable for Recess or Face Fix
- Available as Chain Operated or Child Safe Motorised System
 - Senses Mirage designed bottom rail
 - Fabric mount components

HEADRAIL & BOTTOM RAIL COLOURS



White



Black



Bronze



Cream



Silver



Gunmetal Grey

HEADRAIL & BOTTOM RAIL ENDCAP COLOURS



White



Black Chrome



Brushed Steel



Brushed Bronze



Chrome



Cream

